PATENTVERWAG
COLLECTIVE FURNITURE TO ENJOY

TECHNICAL DATA SHEET POOL


MOD. CRX 20; CRX 25; CRX 30; CRX 35


GRATINGS
STRAIGHT AND CURVABLE

DESCRIPTION

Swimming pool CRX gratings, with its special continuous mesh pattern, guarantees effective water outflow, while also offering an appealing design and absolute safe use.
It observes international regulations (UNI-EN and FINA) that require a minimum distance of 8 mm between ribbing, also when used with the minimum curvature radius.
Made with high density polyethylene, they are resistant to wear, to chemical and atmospheric agents; the special pattern of the ribbing stops foreign elements from getting through into the canal.

DIAGRAM

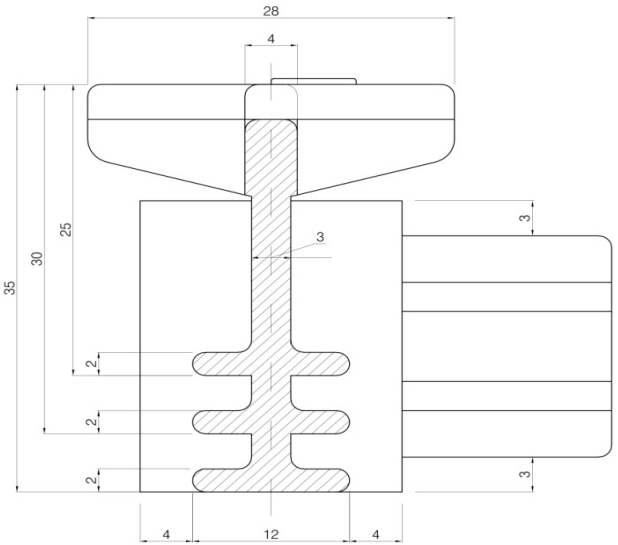

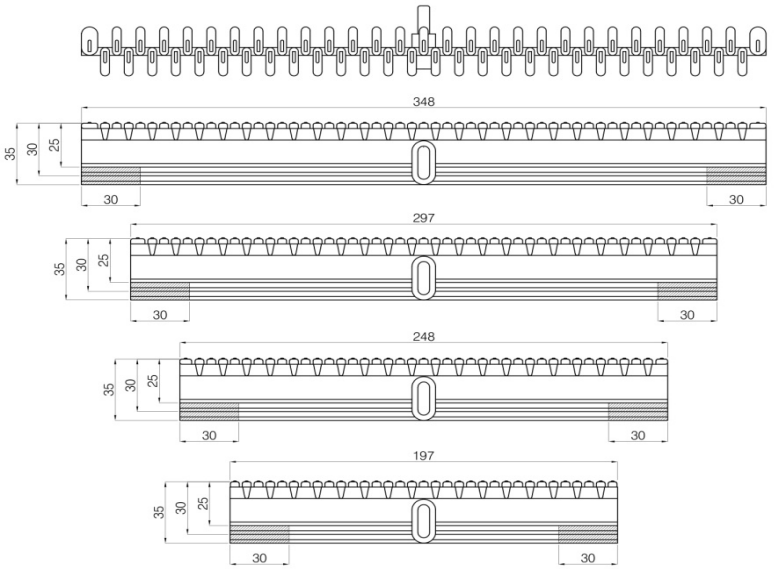

TYPE				
STRAIGHT	ALL MODELS		CORNER ELEMENT	YES
CRX20 20 cm CURVABLE	Minimum width MINIMUM RADIUS	14 cm 38,75	Th. 35 mm MAXIMUM RADIUS	min 30 ; 25
CRX25 25 cm CURVABLE	Minimum width MINIMUM RADIUS	15 cm 54,5	Th. 35 mm MAXIMUM RADIUS	min 30 ; 25
CRX30 30 cm CURVABLE	Minimum width MINIMUM RADIUS	27 cm 65,5	Th. 35 mm MAXIMUM RADIUS	min 30 ; 25
CRX35 35 cm CURVABLE	Minimum width MINIMUM RADIUS	33 cm 77	Th. 35 mm MAXIMUM RADIUS	min 30 ; 25
MATERIAL	POLYETHYLENE with additives resistant to the light and atmospheric agents. impervious to acid.			
COLOUR	WHITE		OTHER (on request)	

